



Sierra CSI Camera Setup

www.dive-xtras.com
4433 Russell Rd, STE 106
Mukilteo
WA 98275 USA
Tel: 425 493 9600
Fax: 425 493 9320


Secure battery connectors together making sure that the colors match up. Then connect the video cables together, making sure that the connection is not loose, as that could cause poor or no signal from the camera.

Install the battery into the scooter body making sure not to pinch the wiring between the battery and the sealing surface.


Attach the battery leads to the motor and connect the video wire to the back of the protective case for the recording device.



Turn recording device on by opening display screen, then rotate and fold flat as shown in the picture. Plug the video cable into the AV port on the recording device. The display will change showing different options. Using the small thumb 'joystick', select "AV in" on the menu. The display will change and now show the view from the CSI camera. Press the record button on the front of the camera and replace in the protective case. (Some models of the recording device maybe come with a remote control.)

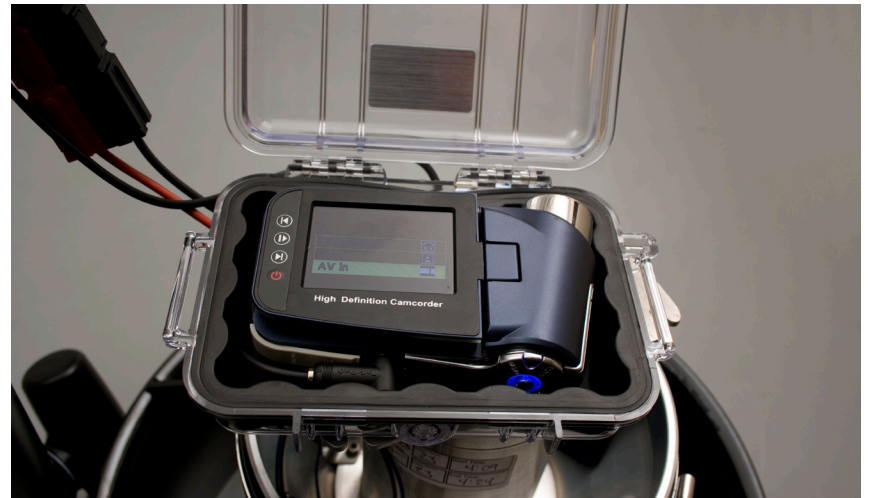

Lock the protective box for the recording device. Secure the protective box to the CSI mount on the Sierra motor with the provided retaining strap. Make sure it is snug to prevent damage from movement during your dive.

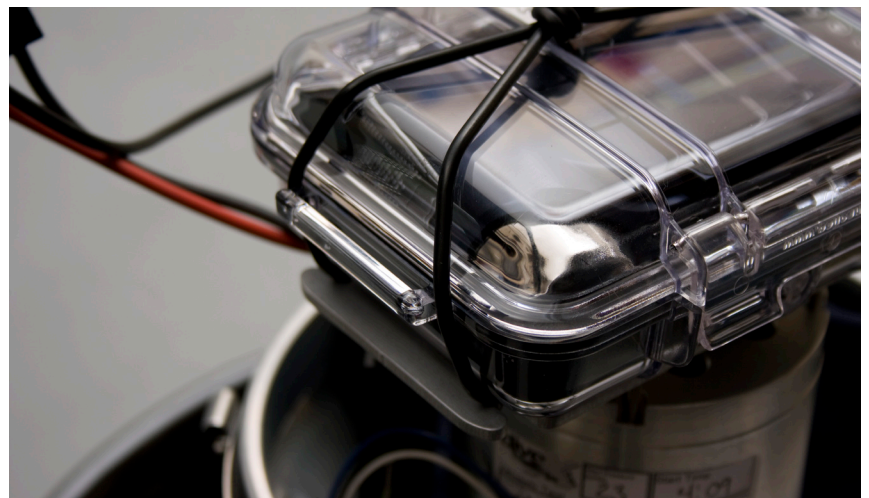



Sierra CSI Camera Setup

www.dive-xtras.com

4433 Russell Rd, STE 106

Mukilteo

WA 98275 USA

Tel: 425 493 9600

Fax: 425 493 9320

This is what the CSI setup should look like just before you attach the body to the tail.

